



## 3.0m HIGH CUBE ZONE 2 REFRIGERATION/FREEZER MODULE

Practical Solutions, Perfectly Contained




**HOOVER FERGUSON**



## 3.0m HIGH CUBE ZONE 2 REFRIGERATION/FREEZER MODULE

- Dual temperature settings for freezer or chiller
- Ambient temperature ranging from -20°C to +50°C
- Electronic control panel enables the adjustment of internal temperature and control of cooling plant function
- Hygienic, easy-to-clean interior
- See-through lockable control panel
- Double wing doors with heavy duty hinges
- Man trapped alarm for personal safety
- Both container and sling assemblies are rated to DNV 2.7-1 and CSC approved
- 3 phase 50HZ 380-415V, 60HZ 440-460V
- Internal cold room doors
- Rear protection gates
- Removable airflow, high grip flooring
- Internal lighting
- Removable shelving systems
- Low voltage 240v internal equipment for personal safety
- Compliant with ATEX 94/9/EC Ex II 3 G c IIB T3 Gc
- Classified for Zone 2 hazardous area

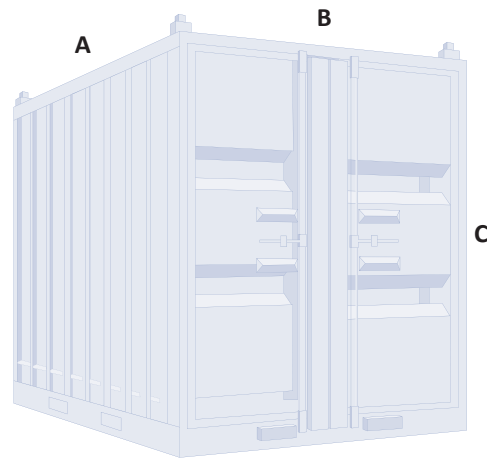

### INTERNAL DIMENSIONS

A 2.04m x B 2.09m x C 2.26m

### EXTERNAL DIMENSIONS

A 2.99m x B 2.44m x C 2.89m

### TARE

4500 kg

### PAYLOAD

7500 kg

### MGW

12000 kg



**HOOVER FERGUSON**

[www.hooverferguson.com](http://www.hooverferguson.com) | [info@hooverferguson.com](mailto:info@hooverferguson.com)

